


# HUBER

## Rotary Screw Thickener S-DRUM

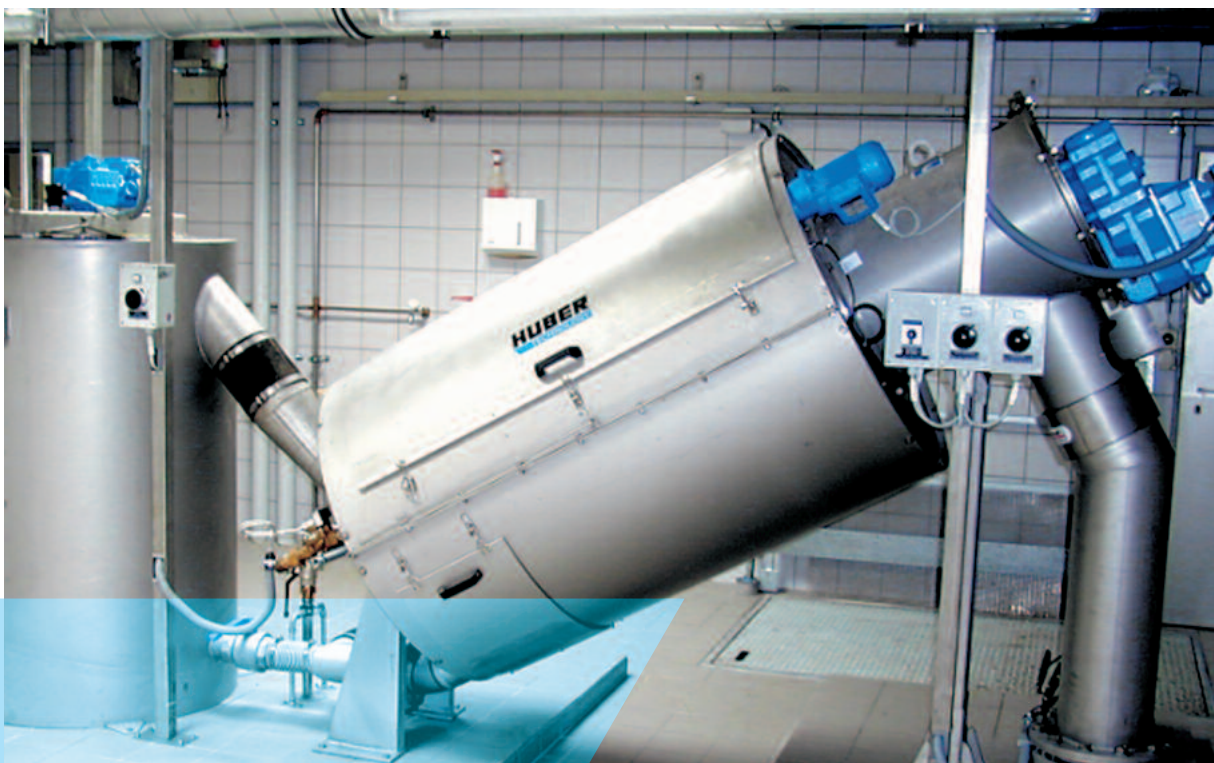


Thickening of municipal and industrial sludges

- compact, enclosed design
- efficient, reliable and easy to operate
- low operation and maintenance costs

## ►► Features

### **HUBER Rotary Screw Thickener S-DRUM for big wastewater treatment plants**

A preceding flocculation reactor with stirrer ensures efficient sludge treatment in the screw thickener. The screw thickener consists of a cylindrical wedge section basket which retains the solids contained within the fed sludge. A screw, slowly rotating with variable speed, conveys the solids gently upward through the inclined basket. Water drains through the basket. The degree of thickening is adjustable by means of a height adjustable weir plate in the sludge discharge and the variable screw speed. A rotating spray bar cleans the wedge wire periodically from the outside during screw operation.

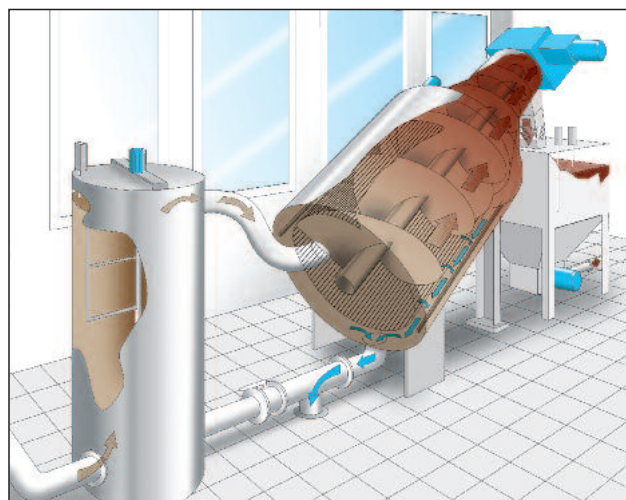

## ►► Benefits

- sludge volume reduction by up to 80 %
- sturdy design for high solids loads and coarse material containing sludge
- maximum system availability due to the virtually wear-resistant and clog-free stainless steel wedge section basket
- high operational reliability due to the slow screw speed
- low power and spray water consumption
- no need for lubrication
- completely encapsulated, odour-free plant
- no vibration
- low noise < 68 dB(A)

## ►► Data

Thickening results > 7 % DR are achieved in typical municipal applications with a polymer consumption of 3-5 g/kg. Power consumption is only 35 W/m<sup>3</sup>, spray water demand only approx. 25 l/m<sup>3</sup>. Different system sizes are available for throughputs from 20 to 100 m<sup>3</sup>/h per unit.

More than 700 installations worldwide prove the reliability HUBER Rotary Screw Thickener S-DRUM.



Two HUBER Rotary Screw Thickener S-DRUM units for 80 m<sup>3</sup>/h



Eight screw thickeners handling 600 m<sup>3</sup>/h

## HUBER SE

Industriepark Erasbach A1 · D-92334 Berching  
 Phone: + 49 - 84 62 - 201 - 0 · Fax: + 49 - 84 62 - 201 - 810  
 info@huber.de · Internet: www.huber.de

Subject to technical modification  
 0,15 / 7 - 5.2016 - 10.2003

HUBER Rotary Screw Thickener S-DRUM